
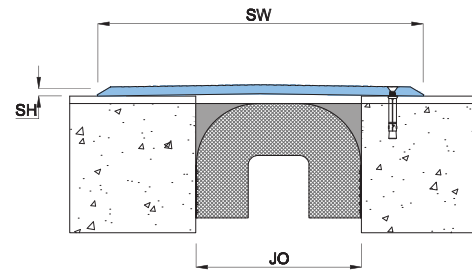




Features

- System designed to be installed over finishes
- Construction Grade Aluminum/Stainless Steel & Brass options available
- Waterproof/Watertight
- System allows full seismic movements
- Heavy duty covers for carparks also available
- Fire Barriers are optionally available

Straight Application HIS

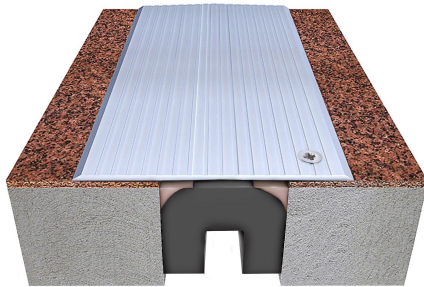

Corner Application HIC

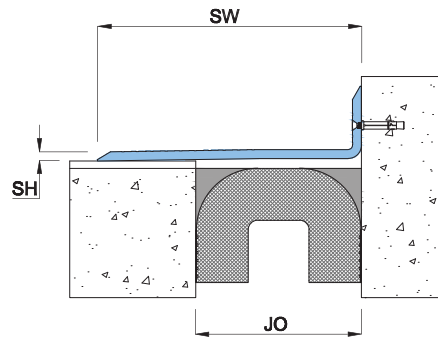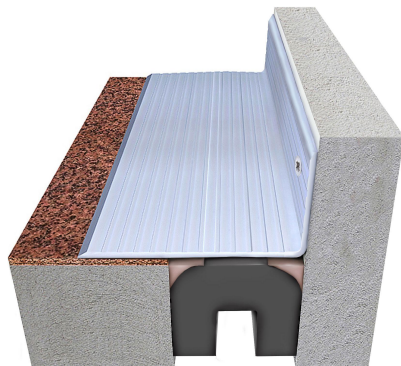

HI Series

EXT. Application

INT. Application

Seismic Movement

FLOOR USE

WALL USE

CEILING USE

Details

Usage : Floor

Joint width : 2" - 12"

Optional : Fire Barrier

Application	Code	JO	SH	SW	± Movement (%)		Load (Ton)
		Millimeter			Horizontal	Shear	
Straight (S)	HIS 02	51	4	125	50	*	3
	HIS 03	76	6	165	50	*	3
	HIS 04	102	7	205	50	*	3
	HIS 05	127	8	250	50	*	3
	HIS 06	152	9	295	50	*	3
	HIS 08	203	11	400	50	*	3
	HIS 10	254	12	480	50	*	3
	HIS 12	305	13	590	50	*	3
Corner (C)	HIC 02	51	4	100	50	*	3
	HIC 03	76	6	130	50	*	3
	HIC 04	102	7	170	50	*	3
	HIC 05	127	8	200	50	*	3
	HIC 06	152	9	245	50	*	3
	HIC 08	203	11	320	50	*	3
	HIC 10	254	12	395	50	*	3
	HIC 12	305	13	475	50	*	3

As Prospec Specialties' policy is one of continual progress for the improvement of the company's services to its customers, the company reserves the right to modify the specifications of its products without notice.