



Features

- System is designed for absorbing tile movements
- Available in Aluminium (YAS), Brass (YBS) and Stainless Steel (YCS)
- Popular Field Limitation Joint
- Commonly used for easy installation

Straight Application YAS (Aluminium)

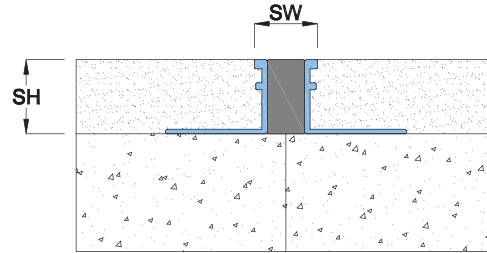

Straight Application YBS (Brass)

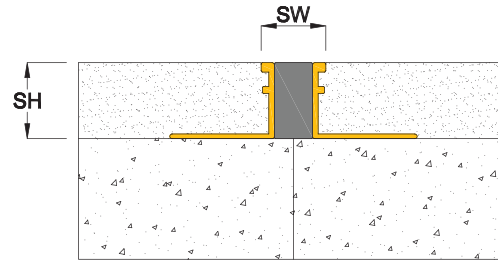

Seal Colors:




Y
Series

INT.
Application

FLOOR
USE

Straight Application YCS (Stainless Steel)

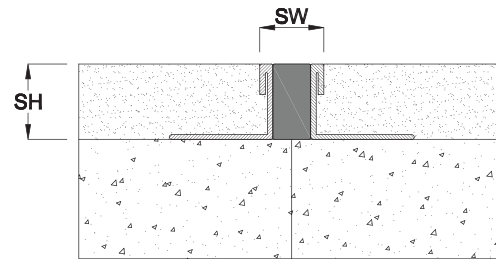

Application	Code	JO	SH	SW	± Movement (%)			Load (Ton)
		Millimeter			Horizontal	Vertical	Shear	
Straight (S)	YAS 007	*	8	10	Limited	*	*	*
	YAS 010	*	11	10	Limited	*	*	*
	YAS 015	*	16	10	Limited	*	*	*
	YAS 020	*	21	10	Limited	*	*	*
	YAS 025	*	26	10	Limited	*	*	*
Straight (S)	YAS 030	*	31	10	Limited	*	*	*
	YBS 007	*	8	10	Limited	*	*	*
	YBS 010	*	11	10	Limited	*	*	*
	YBS 015	*	16	10	Limited	*	*	*
	YBS 020	*	21	10	Limited	*	*	*
Straight (S)	YBS 025	*	26	10	Limited	*	*	*
	YBS 030	*	31	10	Limited	*	*	*
	YCS 007	*	8	10	Limited	*	*	*
	YCS 010	*	11	10	Limited	*	*	*
	YCS 015	*	16	10	Limited	*	*	*
Straight (S)	YCS 020	*	21	10	Limited	*	*	*
	YCS 025	*	26	10	Limited	*	*	*
	YCS 030	*	31	10	Limited	*	*	*

Details

Usage : Floor

Sight width : 10 mm

As Prospec Specialties' policy is one of continual progress for the improvement of the company's services to its customers, the company reserves the right to modify the specifications of its products without notice.