
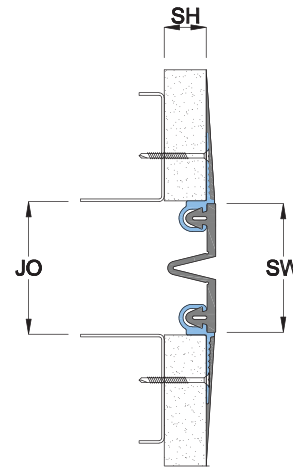



## Features

- Surface mounted system designed for retrofit installation
- Firmly fixed Santoprene gasket offer movement tractability without shearing or breaking
- System is suitable for full seismic movements
- Commonly used system that is easy to install and maintain
- Unique design for gypsum board dry-walls
- Fire Barriers are optionally available

Straight Application FAS



Corner Application FAC

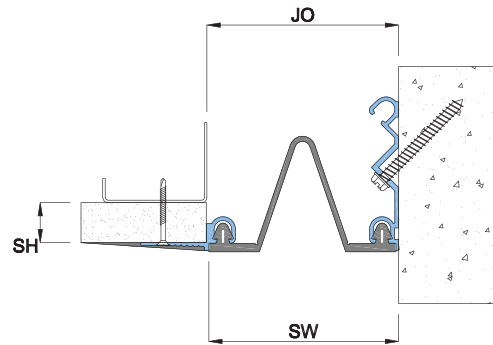

FA Series

INT. Application

Seismic Movement

WALL USE

CEILING USE

Seal Colors:

BK

BG

WH

GY

## Details

Usage : Wall/Ceiling

Joint width : 1" - 6"

Optional : Fire Barrier

Wider Joint Cover available at request

Application	Code	JO	SH	SW	± Movement (%)			Load (Ton)
		Millimeter			Horizontal	Vertical	Shear	
Straight (S)	FAS 01	41	16	43	50	50	Excellent	*
	FAS 02	51	16	52	50	50	Excellent	*
	FAS 03	76	16	78	50	50	Excellent	*
	FAS 04	102	16	103	50	50	Excellent	*
	FAS 06	152	16	154	50	50	Excellent	*
Corner (C)	FAC 01	41	16	42	50	50	Excellent	*
	FAC 02	51	16	50	50	50	Excellent	*
	FAC 03	76	16	75	50	50	Excellent	*
	FAC 04	102	16	100	50	50	Excellent	*
	FAC 06	152	16	150	50	50	Excellent	*

As Prospec Specialties' policy is one of continual progress for the improvement of the company's services to its customers, the company reserves the right to modify the specifications of its products without notice.