
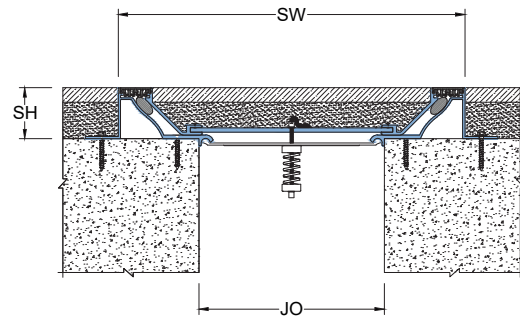


Features



- System designed to be installed in recessed floor
- Seismic Pan System for accommodating various floor finishes
- Firmly fixed Santoprene gasket offer ideal movement tractability without shearing or breaking
- Steel central flanges allows swift shift between positive and negative movements
- Specially designed spring assembly under pan provides swift correction after seismic movement and silent passage to pedestrians and wheels
- System allows full seismic movements
- System allows excellent shear movement
- Load rated subject to joint opening
- ADA compliant
- Vapor and Fire Barriers are optionally available

Straight Application EKS

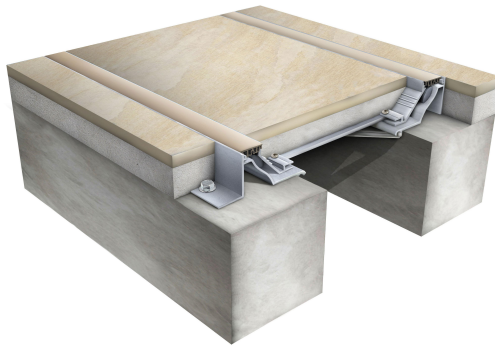

- EK Systems
- INT. Application
- Seismic Movement
- FLOOR USE

Corner Application EKC

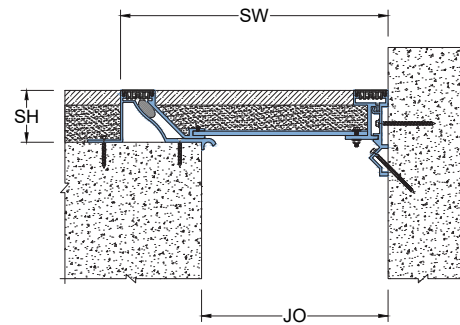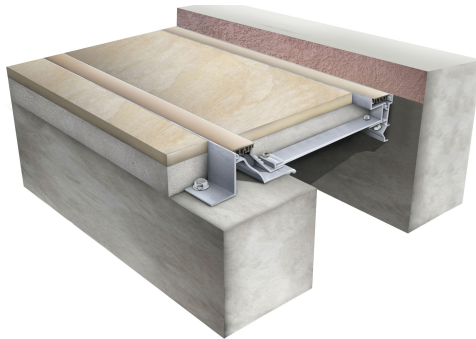

Details

Usage : Floor

Joint width : 10"

Optional : Vapor/Fire Barrier

Application	Code	JO	SH	SW	± Movement (%)			Load (Ton)
					Millimeter			
					Horizontal	Vertical	Shear	
Straight (S)	EKS 10	254	70	475	100	25	Excellent	1
Corner (C)	EKC 10	254	70	364	100	25	Excellent	1

As Prospec Specialties' policy is one of continual progress for the improvement of the company's services to its customers, the company reserves the right to modify the specifications of its products without notice.