


Features

- System designed for external / internal floors
- Neoprene/EPDM Seal for car parks and bridge decks
- Provides excellent impermeability
- Excellent for seamless installation in curves and radius
- UV stabilized
- System allows limited seismic movements
- For smooth vehicular / pedestrian movement, install leveled to floor
- Use epoxy adhesive for secure installation
- Install on concrete up-stand for leveled installation

Straight / Corner Application KAS

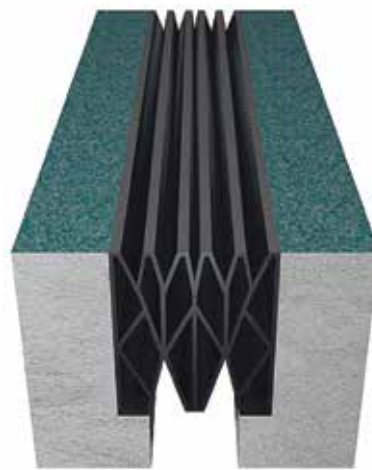


KA
Series

EXT.
Application

INT.
Application

Thermal
Movement

FLOOR
USE

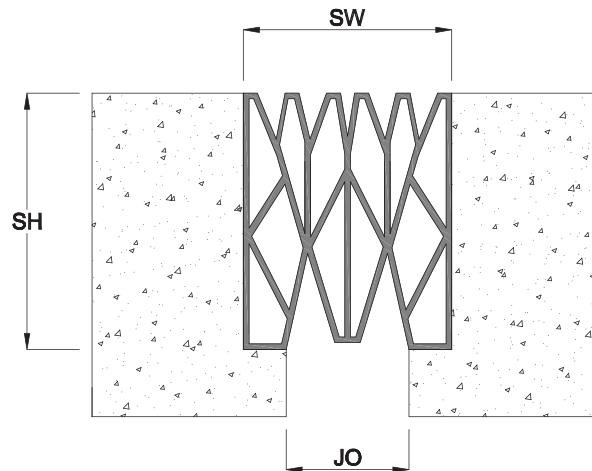

Details

Usage : Floor

Joint width : 1" - 6"

Optional : Fire Barrier

Application	Code	JO	SH	SW	± Movement (%)			Load (Ton)
					Horizontal	Vertical	Shear	
Straight / Corner	KAS 01	25	40	35	25	10	Excellent	*
	KAS 02	51	50	75	25	10	Excellent	*
	KAS 03	76	75	94	25	10	Excellent	*
	KAS 04	102	75	125	25	10	Excellent	*
	KAS 05	127	100	170	25	10	Excellent	*
	KAS 06	152	150	200	25	10	Excellent	*

As Prospec Specialties' policy is one of continual progress for the improvement of the company's services to its customers, the company reserves the right to modify the specifications of its products without notice.