
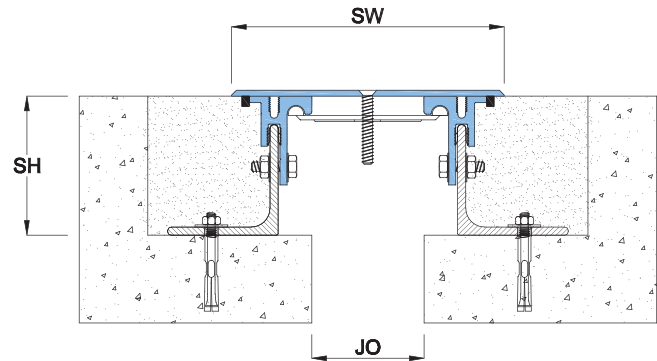



Features

- System designed to be installed in recessed floor
- Central plate of construction grade aluminium accomodates various floor finishes
- Steel central flanges allows swift shift between positive and negative movements
- System allows full seismic movements
- Load rated for heavy vehicular traffic
- Vapor and Fire Barriers are optionally available
- System allows excellent shear movements
- System specially designed to accommodate sub-floors of variable heights

Straight Application GCS

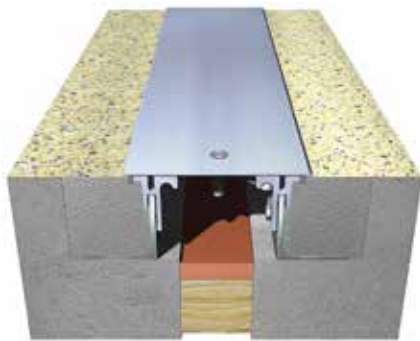

Corner Application GCC

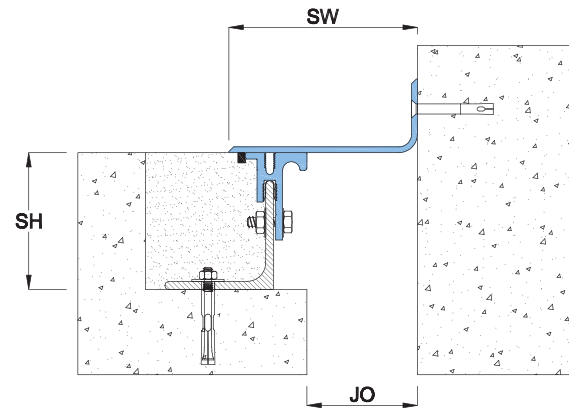

- GC Series
- EXT. Application
- INT. Application
- Seismic Movement
- FLOOR USE

Details

Usage : Floor

Joint width : 2"-12"

Optional : Vapor/Fire Barrier

Application	Code	JO	SH	SW	+ Movement (%)			Load (Ton)
					Horizontal	Vertical	Shear	
Straight (S)	GCS 02	51	94	150	50	50	Excellent	3
	GCS 03	76	94	185	50	50	Excellent	3
	GCS 04	102	94	220	50	50	Excellent	3
	GCS 06	152	94	300	50	50	Excellent	2
	GCS 08	203	94	375	50	50	Excellent	2
	GCS 10	254	94	460	50	50	Excellent	2
	GCS 12	305	94	525	50	50	Excellent	2
Corner (C)	GCC 02	51	94	100	50	13	Excellent	3
	GCC 03	76	94	130	50	13	Excellent	3
	GCC 04	102	94	170	50	13	Excellent	3
	GCC 06	152	94	245	50	13	Excellent	2
	GCC 08	203	94	320	50	13	Excellent	2
	GCC 10	254	94	395	50	13	Excellent	2
	GCC 12	305	94	475	50	13	Excellent	2

As Prospec Specialties' policy is one of continual progress for the improvement of the company's services to its customers, the company reserves the right to modify the specifications of its products without notice.