
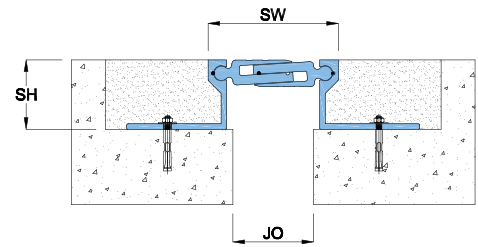


## Features

- System designed to be installed in floor recess
- System allows minor seismic movements
- System allows excellent shear movements
- Design for pneumatic and solid tires
- Ideal for vehicular traffic depending upon gap width
- Vapor and Fire Barriers are optionally available

### Straight Application MBS

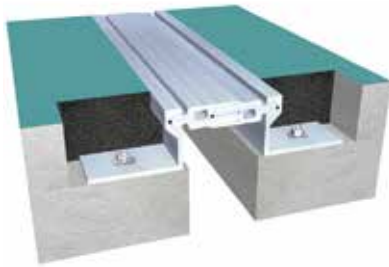

**MB**  
Series



**EXT.**  
Application

**INT.**  
Application

**Seismic**  
Movement

**FLOOR**  
USE

### Corner Application MBC

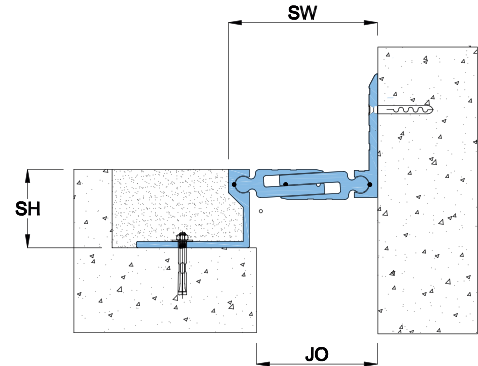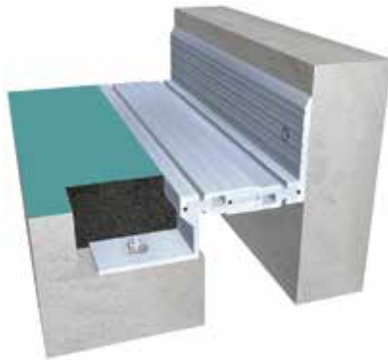

## Details

Usage : Floor

Joint width : 1" - 4"

Optional : Vapor/Fire Barrier

Application	Code	JO	SH	SW	± Movement (%)			Load (Ton)
					Horizontal	Vertical	Shear	
Straight (S)	MBS 01	25	38	41	15	15	Excellent	3.5
	MBS 02	51	38	71	15	15	Excellent	3.5
	MBS 03	76	38	96	20	20	Excellent	3.5
	MBS 04	102	38	122	20	20	Excellent	3.5
Corner (C)	MBC 01	25	38	41	15	15	Excellent	3.5
	MBC 02	51	38	71	15	15	Excellent	3.5
	MBC 03	76	38	96	20	20	Excellent	3.5
	MBC 04	102	38	122	20	20	Excellent	3.5

As Prospec Specialties' policy is one of continual progress for the improvement of the company's services to its customers, the company reserves the right to modify the specifications of its products without notice.