
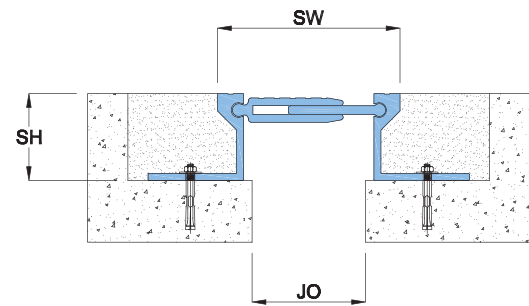


Features

- System designed to be installed in floor recess
- System allows minor seismic movements
- System allows excellent shear movements
- Designed for pneumatic and solid tires
- Ideal for vehicular traffic depending upon gap width
- Vapor and Fire Barriers are optionally available

Straight Application MAS

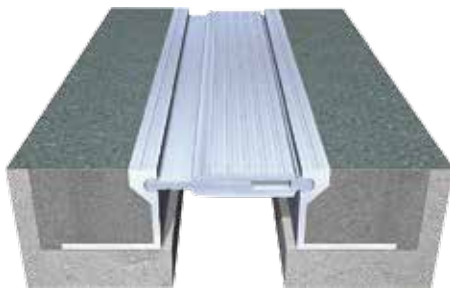

MA Series



EXT. Application

INT. Application

Seismic Movement

FLOOR USE

Corner Application MAC

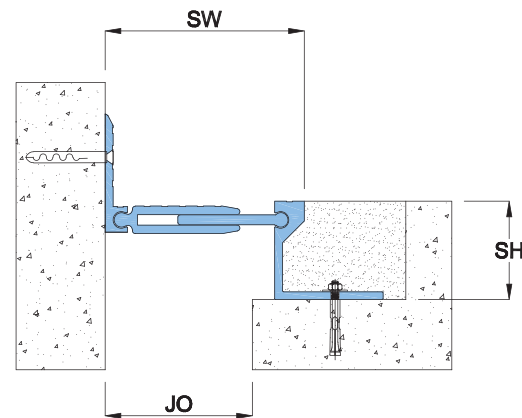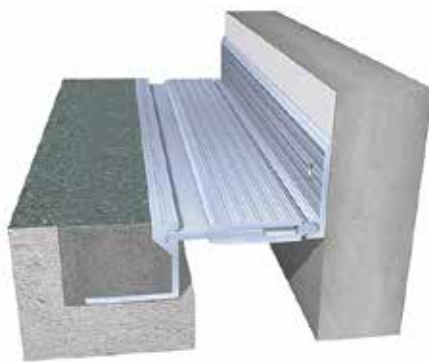

Details

Usage : Floor

Joint width : 1" - 4"

Optional : Vapor/Fire Barrier

Application	Code	JO	SH	SW	± Movement (%)			Load (Ton)
					Millimeter			
					Horizontal	Vertical	Shear	
Straight (S)	MAS 01	25	38	43	25	25	Excellent	3.5
	MAS 1.5	40	38	58	25	25	Excellent	3.5
	MAS 02	51	38	72	25	25	Excellent	3.5
	MAS 03	76	38	98	25	25	Excellent	3.5
	MAS 04	102	38	127	25	25	Excellent	3.5
Corner (C)	MAC 01	25	38	44	25	25	Excellent	3.5
	MAC 1.5	40	38	59	25	25	Excellent	3.5
	MAC 02	51	38	72	25	25	Excellent	3.5
	MAC 03	76	38	98	25	25	Excellent	3.5
	MAC 04	102	38	127	25	25	Excellent	3.5

As Prospec Specialties' policy is one of continual progress for the improvement of the company's services to its customers, the company reserves the right to modify the specifications of its products without notice.