
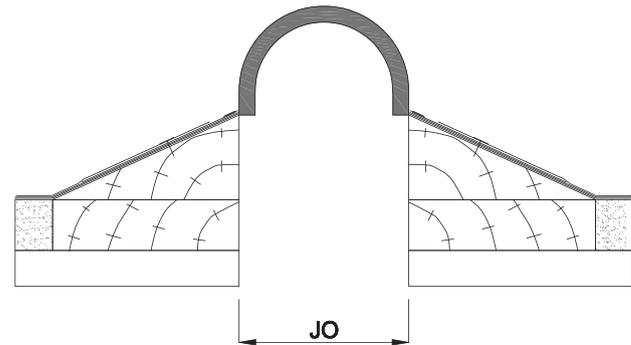


Features

- System designed for surface mount installation
- EPDM bellows with GI flanges are suitable for harsh weather conditions
- System remains watertight even during severe cyclical seismic movements
- System is suitable for full seismic movements
- Factory formed transitions available
- Copper / Stainless Steel flanges are available
- Splicing Kit available for making on-site directional changes

Straight Application SBS

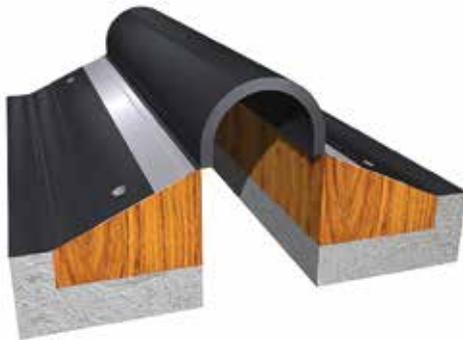


SB
Series

EXT.
Application

Seismic
Movement

ROOF
USE

Corner Application SBC

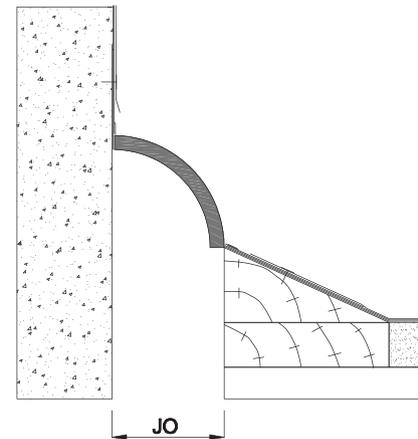

Details

Usage : Roof

Joint width : 2" - 8"

Optional : Fire Barrier

Application	Code	JO	SH	SW	± Movement (%)			Load (Ton)
		Millimeter			Horizontal	Vertical	Shear	
Straight (S)	SBS 02	51	*	*	50	50	Excellent	*
	SBS 03	76	*	*	50	50	Excellent	*
	SBS 04	102	*	*	50	50	Excellent	*
	SBS 06	152	*	*	50	50	Excellent	*
	SBS 08	203	*	*	50	50	Excellent	*
Corner (C)	SBC 02	51	*	*	50	50	Excellent	*
	SBC 03	76	*	*	50	50	Excellent	*
	SBC 04	102	*	*	50	50	Excellent	*
	SBC 06	152	*	*	50	50	Excellent	*
	SBC 08	203	*	*	50	50	Excellent	*

As Prospec Specialties' policy is one of continual progress for the improvement of the company's services to its customers, the company reserves the right to modify the specifications of its products without notice.