
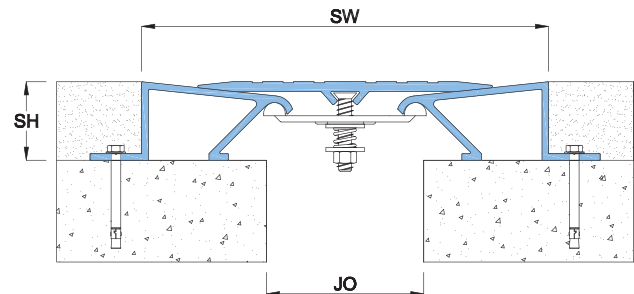




Features

- System designed to be installed in recessed floor / wall
- Steel central flanges allows swift shift between positive and negative movements
- Specially designed spring assembly under the central plate provides silent passage to pedestrians and wheels
- No bump structure is ADA compliant
- System allows full seismic movements
- System allows excellent shear movements
- Load rated subject to joint opening
- Vapor and Fire Barriers are optionally available
- Carpet / PVC floor coverings when inserted under the central plate, provides exceptionally neat installation

Straight Application DDS

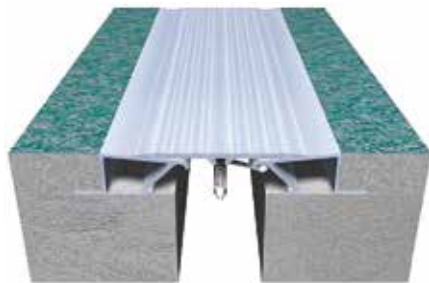

Corner Application DDC

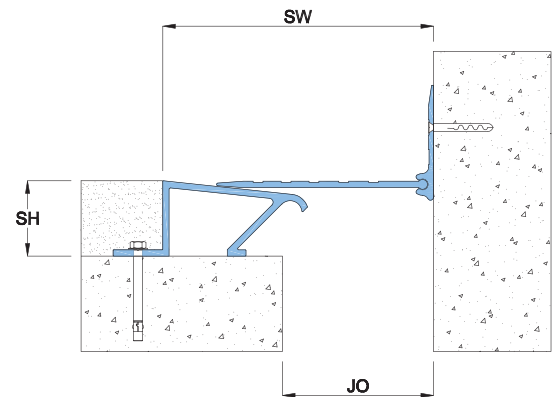

- DD Series
- EXT. Application
- INT. Application
- Seismic Movement
- FLOOR USE
- WALL USE

Details

Usage : Floor/Wall

Joint width : 1" - 8"

Optional : Vapor/Fire Barrier

Application	Code	JO	SH	SW	± Movement (%)			Load (Ton)
					Millimeter			
					Horizontal	Vertical	Shear	
Straight (S)	DDS 01	25	38	117	50	25	Excellent	3
	DDS 02	51	38	140	50	25	Excellent	3
	DDS 03	76	38	197	50	25	Excellent	3
	DDS 04	102	38	222	50	25	Excellent	3
	DDS 06	152	38	342	50	25	Excellent	3
DDS 08	203	38	457	50	25	Excellent	3	
Corner (C)	DDC 01	25	38	70	25	25	Excellent	3
	DDC 02	51	38	95	25	25	Excellent	3
	DDC 03	76	38	137	25	25	Excellent	3
	DDC 04	102	38	162	25	25	Excellent	3
	DDC 06	152	38	248	25	25	Excellent	3
	DDC 08	203	38	331	25	25	Excellent	3

As Prospec Specialties' policy is one of continual progress for the improvement of the company's services to its customers, the company reserves the right to modify the specifications of its products without notice.