
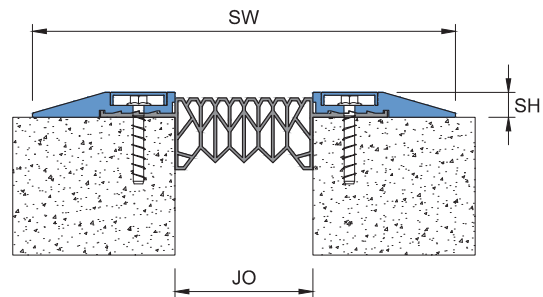


Features

- System designed for external/internal floors
- Santoprene/EPDM Seal for car parks and bridges decks
- Construction Grade aluminum side frames
- Suitable for watertight applications
- System allows excellent shear movements
- UV stabilized
- System allows good seismic movements
- Retrofit installation
- Does not require any cut out or floor modifications for installation
- Heavy duty application

Straight Application KES

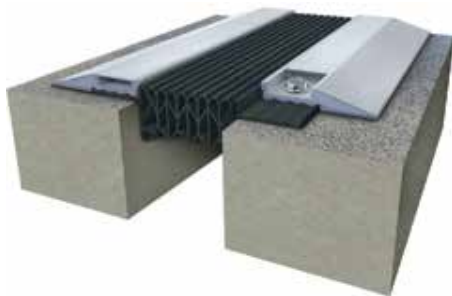

FH
Series


EXT.
Application

INT.
Application

Thermal
Movement

FLOOR
USE

Corner Application KEC

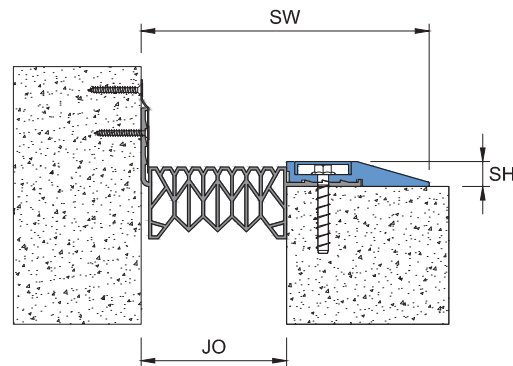

Details

Usage : Floor

Joint width : 1" - 4"

Optional : Fire Barrier

Application	Code	JO	SH	SW	± Movement (%)			Load (Ton)
		Millimete			Horizontal	Vertical	Shear	
Straight (S)	KES 01	25	18	233	50	15	Excellent	5
	KES 02	51	18	259	50	15	Excellent	5
	KES 03	76	18	284	50	15	Excellent	5
	KES 04	102	18	310	50	15	Excellent	5
Corner (C)	KEC 01	25	18	129	50	15	Excellent	5
	KEC 02	51	18	155	50	15	Excellent	5
	KEC 03	76	18	180	50	15	Excellent	5
	KEC 04	102	18	206	50	15	Excellent	5

As Prospec Specialties' policy is one of continual progress for the improvement of the company's services to its customers, the company reserves the right to modify the specifications of its products without notice.