


## Features

- Surface mounted system designed for retrofit installation
- Firmly fixed Santoprene gasket offer ideal movement tractability without shearing or breaking
- System is suitable for minor seismic movements
- Commonly used system that is easy to install and maintain
- Allows narrow shear movement
- Suitable for heavy pedestrian traffic and hand trolley loads
- Vapor and Fire Barriers are optionally available
- Installation is recommended for Carpet floor finishes

### Straight Application AFS

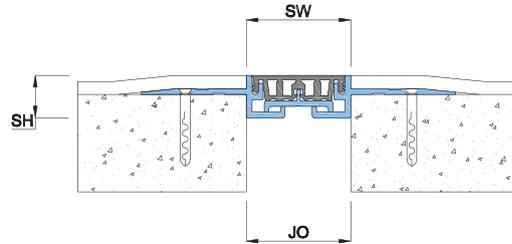


Seal Colors:

- BK
- BG
- WH
- GY

- AF Series
- INT. Application
- Thermal Movement
- FLOOR USE

### Corner Application AFC

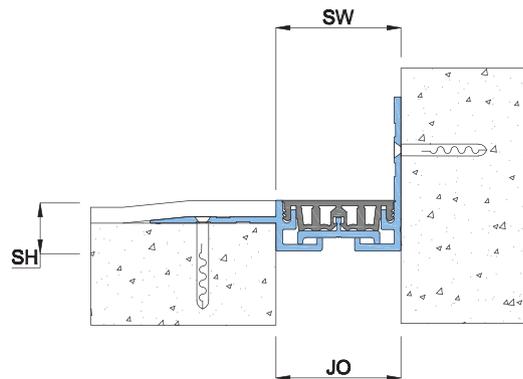

## Details

Usage : Floor

Joint width : 1" - 3"

Optional : Vapor/Fire Barrier

Application	Code	JO	SH	SW	± Movement (%)			Load (Ton)
					Millimeter			
					Horizontal	Vertical	Shear	
Straight (S)	AFS 01	25	11	25	25	25	Narrow	3
	AFS 02	51	19	51	25	25	Narrow	2
	AFS 03	76	21	76	25	25	Narrow	2
Corner (C)	AFC 01	25	11	25	25	25	Narrow	3
	AFC 02	51	19	51	25	25	Narrow	2
	AFC 03	76	21	76	25	25	Narrow	2

As Prospec Specialties' policy is one of continual progress for the improvement of the company's services to its customers, the company reserves the right to modify the specifications of its products without notice.