



Features

- System designed to be installed in recessed floor
- Available in 304 or 316 grade, Stainless Steel
- Compression seal convenient, durable, waterproof expansion joint
- System allows full seismic movements
- Load rated for heavy vehicular traffic
- Fire Barriers is optionally available

Straight Application FHS

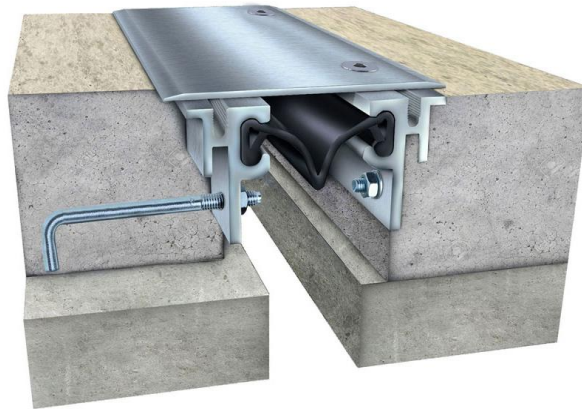

- FH Series
- EXT. Application
- INT. Application
- Thermal Movement
- FLOOR USE

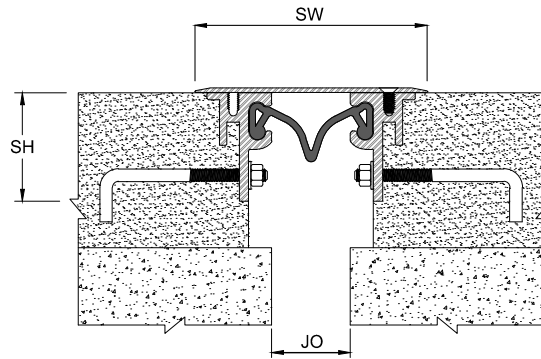

Details

Usage : Floor

Joint width : 1 - 4"

Optional : Fire Barrier

Application	Code	JO	SH	SW	± Movement (%)			Load
					Millimeter	Horizontal	Vertical	
Straight (S)	FHS 01	25	70	125	50	*	Excellent	Vehicular
	FHS 02	51	70	150	50	*	Excellent	Vehicular
	FHS 03	76	70	175	50	*	Excellent	Vehicular
	FHS 04	102	70	205	50	*	Excellent	Vehicular

As Prospec Specialties' policy is one of continual progress for the improvement of the company's services to its customers, the company reserves the right to modify the specifications of its products without notice.