
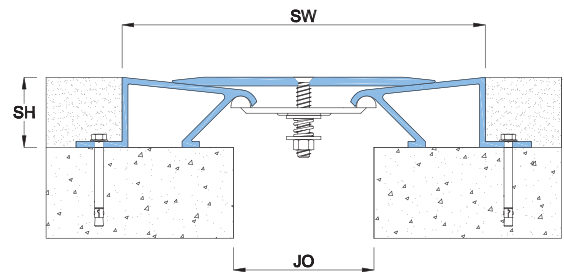


Features

- System designed to be installed in recessed floor / wall
- Easy to install and maintain
- Steel central flanges allows swift shift between positive and negative movements
- Specially designed spring assembly under the central plate provides silent passage to pedestrians and wheels
- Carpet / PVC floor coverings when inserted under the central plate, provides exceptionally neat installation
- No bump structure is ADA compliant
- System allows full seismic movements
- System allows excellent shear movements
- Load rated subject to joint opening
- Vapor and Fire Barriers are optionally available

Straight Application DFS

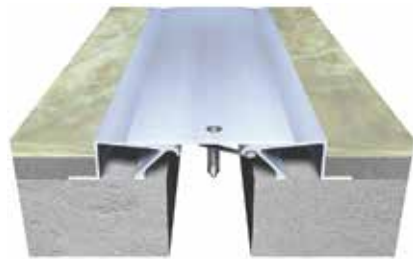

DF Series

EXT. Application



INT. Application

Seismic Movement

FLOOR USE

WALL USE

Corner Application DFC

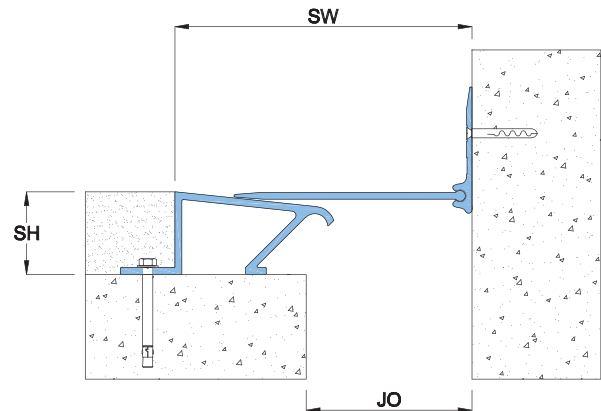

Details

Usage : Floor/Wall

Joint width : 1" - 8"

Optional : Vapor/Fire Barrier

Application	Code	JO	SH	SW	± Movement (%)			Load (Ton)
					Millimeter		Horizontal	
Straight (S)	DFS 01	25	38	117	50	25	Excellent	3
	DFS 02	51	38	140	50	25	Excellent	3
	DFS 03	76	38	197	50	25	Excellent	3
	DFS 04	102	38	222	50	25	Excellent	3
	DFS 06	152	38	342	50	25	Excellent	3
	DFS 08	203	38	457	50	25	Excellent	3
Corner (C)	DFC 01	25	38	70	25	25	Excellent	3
	DFC 02	51	38	95	25	25	Excellent	3
	DFC 03	76	38	137	25	25	Excellent	3
	DFC 04	102	38	162	25	25	Excellent	3
	DFC 06	152	38	248	25	25	Excellent	3
	DFC 08	203	38	331	25	25	Excellent	3

As Prospec Specialties' policy is one of continual progress for the improvement of the company's services to its customers, the company reserves the right to modify the specifications of its products without notice.