


Features

- Surface mounted system, designed for retrofit installation
- Installation is recommended over finishes
- Firmly fixed Santoprene gasket ideal for movement tractability without shearing or breaking
- System is suitable for minor seismic movements
- Allows narrow shear movement
- Suitable for heavy pedestrian traffic and hand trolley loads
- Vapor and Fire Barriers are optionally available
- Commonly used system that is easy to install and maintain

Straight Application ADS

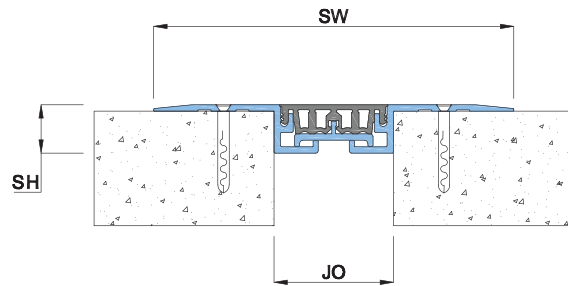

Seal Colors:


BK

BG

WH

GY

Corner Application ADC

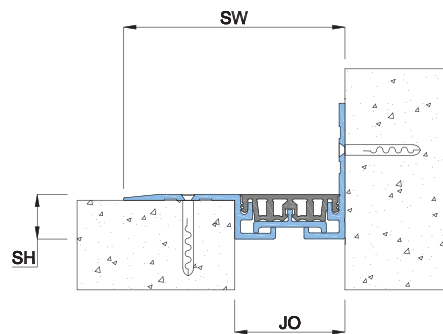

- AD Series
- EXT. Application
- INT. Application
- Thermal Movement
- FLOOR USE
- WALL USE
- CEILING USE

Details

Usage : Floor/Wall/Ceiling

Joint width : 1" - 3"

Optional : Vapor/Fire Barrier

Application	Code	JO	SH	SW	± Movement (%)			Load (Ton)
					Millimeter			
Straight (S)	ADS 01	25	11	120	25	25	Narrow	3
	ADS 02	51	19	144	25	25	Narrow	2
	ADS 03	76	21	170	25	25	Narrow	2
Corner (C)	ADC 01	25	11	73	25	25	Narrow	3
	ADC 02	51	19	95	25	25	Narrow	2
	ADC 03	76	21	120	25	25	Narrow	2

As Prospec Specialties' policy is one of continual progress for the improvement of the company's services to its customers, the company reserves the right to modify the specifications of its products without notice.