
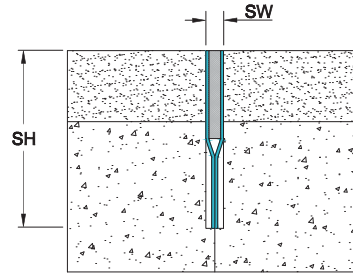




Features

- System is designed for absorbing tile movements
- Popular Field Limitation Joint
- Commonly used for easy installation

Straight Application UAS (Aluminum)



Straight Application UBS (Brass)

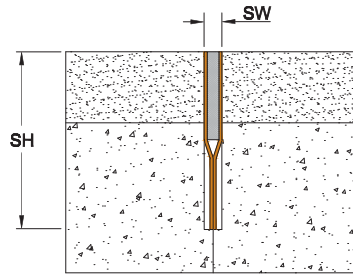

Seal Colors:





U
Series

INT.
Application

FLOOR
USE

Straight Application USS (Stainless Steel)

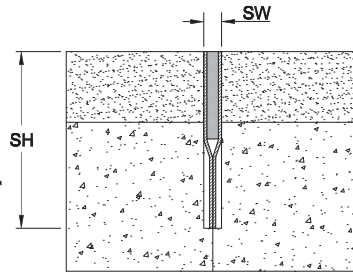

Details

Usage : Floor

Sight width : 5 mm

Application	Code	JO	SH	SW	± Movement (%)			Load (Ton)
		Millimeter			Horizontal	Vertical	Shear	
Straight (S)	UAS 030	*	30	5	Limited	*	*	*
	UAS 040	*	40	5	Limited	*	*	*
	UAS 050	*	50	5	Limited	*	*	*
	UAS 060	*	60	5	Limited	*	*	*
	UAS 070	*	70	5	Limited	*	*	*
	UAS 100	*	100	5	Limited	*	*	*
Straight (S)	UBS 030	*	30	5	Limited	*	*	*
	UBS 040	*	40	5	Limited	*	*	*
	UBS 050	*	50	5	Limited	*	*	*
	UBS 060	*	60	5	Limited	*	*	*
	UBS 070	*	70	5	Limited	*	*	*
	UBS 100	*	100	5	Limited	*	*	*
Straight (S)	USS 030	*	30	5	Limited	*	*	*
	USS 040	*	40	5	Limited	*	*	*
	USS 050	*	50	5	Limited	*	*	*
	USS 060	*	60	5	Limited	*	*	*
	USS 070	*	70	5	Limited	*	*	*
	USS 100	*	100	5	Limited	*	*	*

As Prospec Specialties' policy is one of continual progress for the improvement of the company's services to its customers, the company reserves the right to modify the specifications of its products without notice.