



Features

- System is designed for absorbing tile movements
- Commonly used for easy installation
- Popular Field Limitation Joint
- Available in Aluminium (XAS), Brass (XBS) and Stainless Steel (XSS)


Straight Application XAS (Aluminium)



Straight Application XBS (Brass)



Straight Application XSS (Stainless Steel)

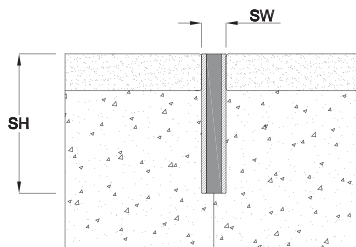

X
Series

INT.
Application

FLOOR
USE

Seal Colors:

- BK**
- BG**
- GY**
- WH**

Details

Usage : Floor

Sight width : 9 mm

Application	Code	JO	SH	SW	± Movement (%)			Load (Ton)
					Millimeter			
Straight (S)	XAS 030	*	30	9	Limited	*	*	*
	XAS 040	*	40	9	Limited	*	*	*
	XAS 050	*	50	9	Limited	*	*	*
Straight (S)	XBS 030	*	30	9	Limited	*	*	*
	XBS 040	*	40	9	Limited	*	*	*
	XBS 050	*	50	9	Limited	*	*	*
Straight (S)	XSS 030	*	30	9	Limited	*	*	*
	XSS 040	*	40	9	Limited	*	*	*
	XSS 050	*	50	9	Limited	*	*	*

As Prospec Specialties' policy is one of continual progress for the improvement of the company's services to its customers, the company reserves the right to modify the specifications of its products without notice.